

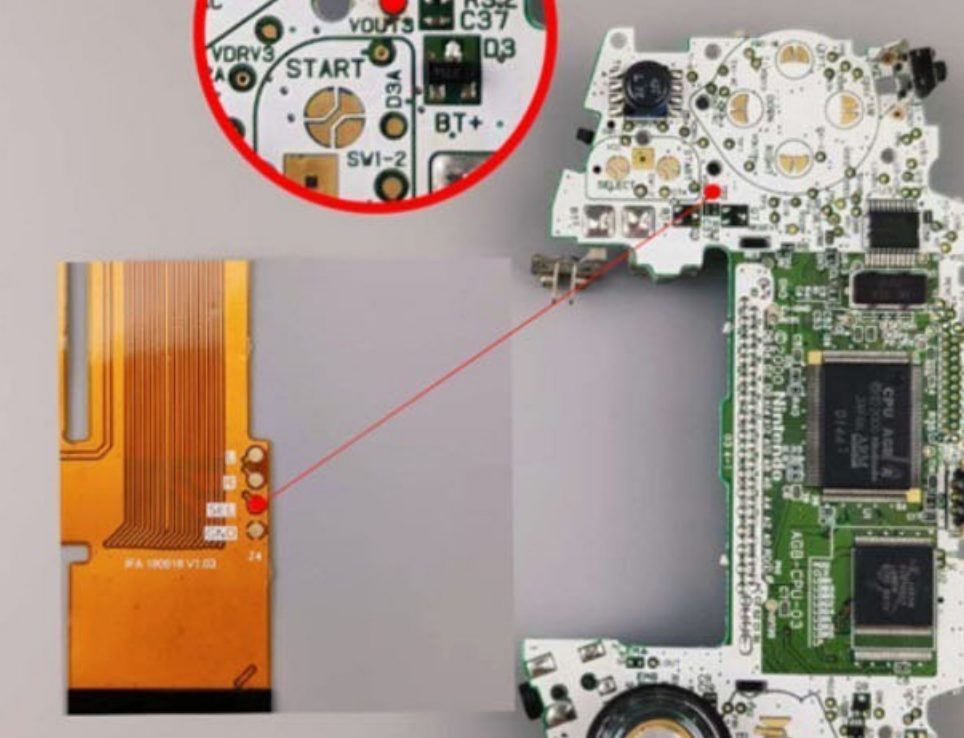
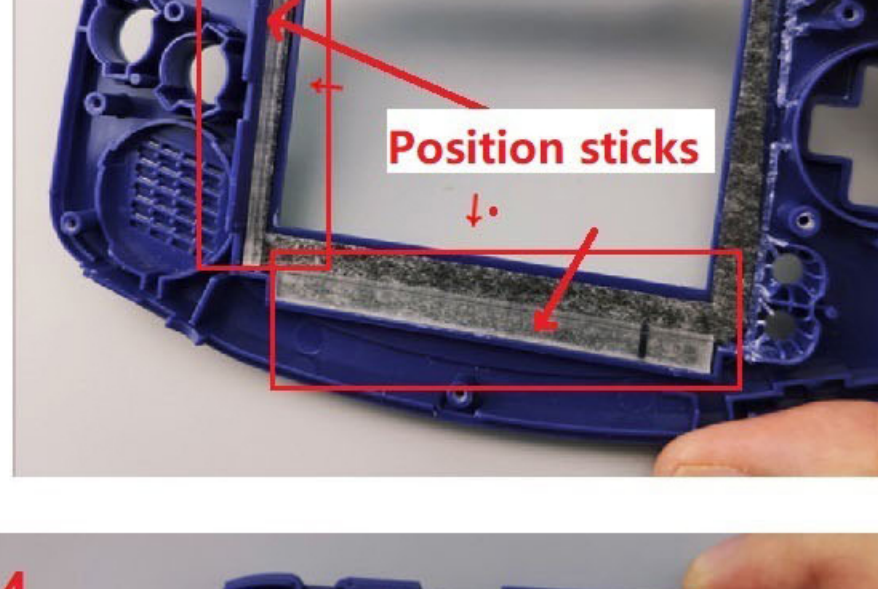
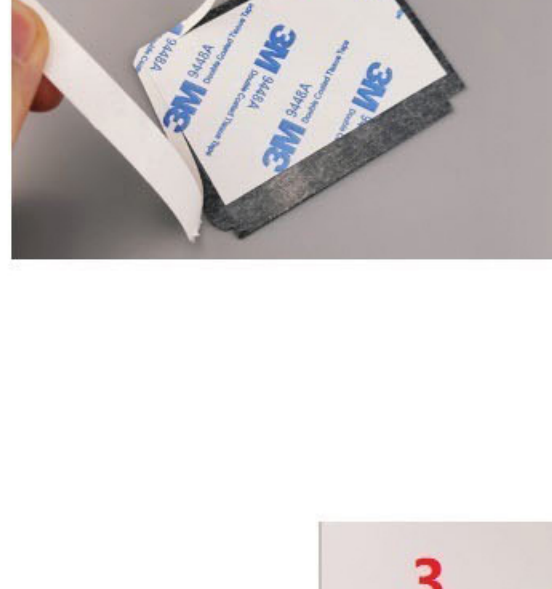
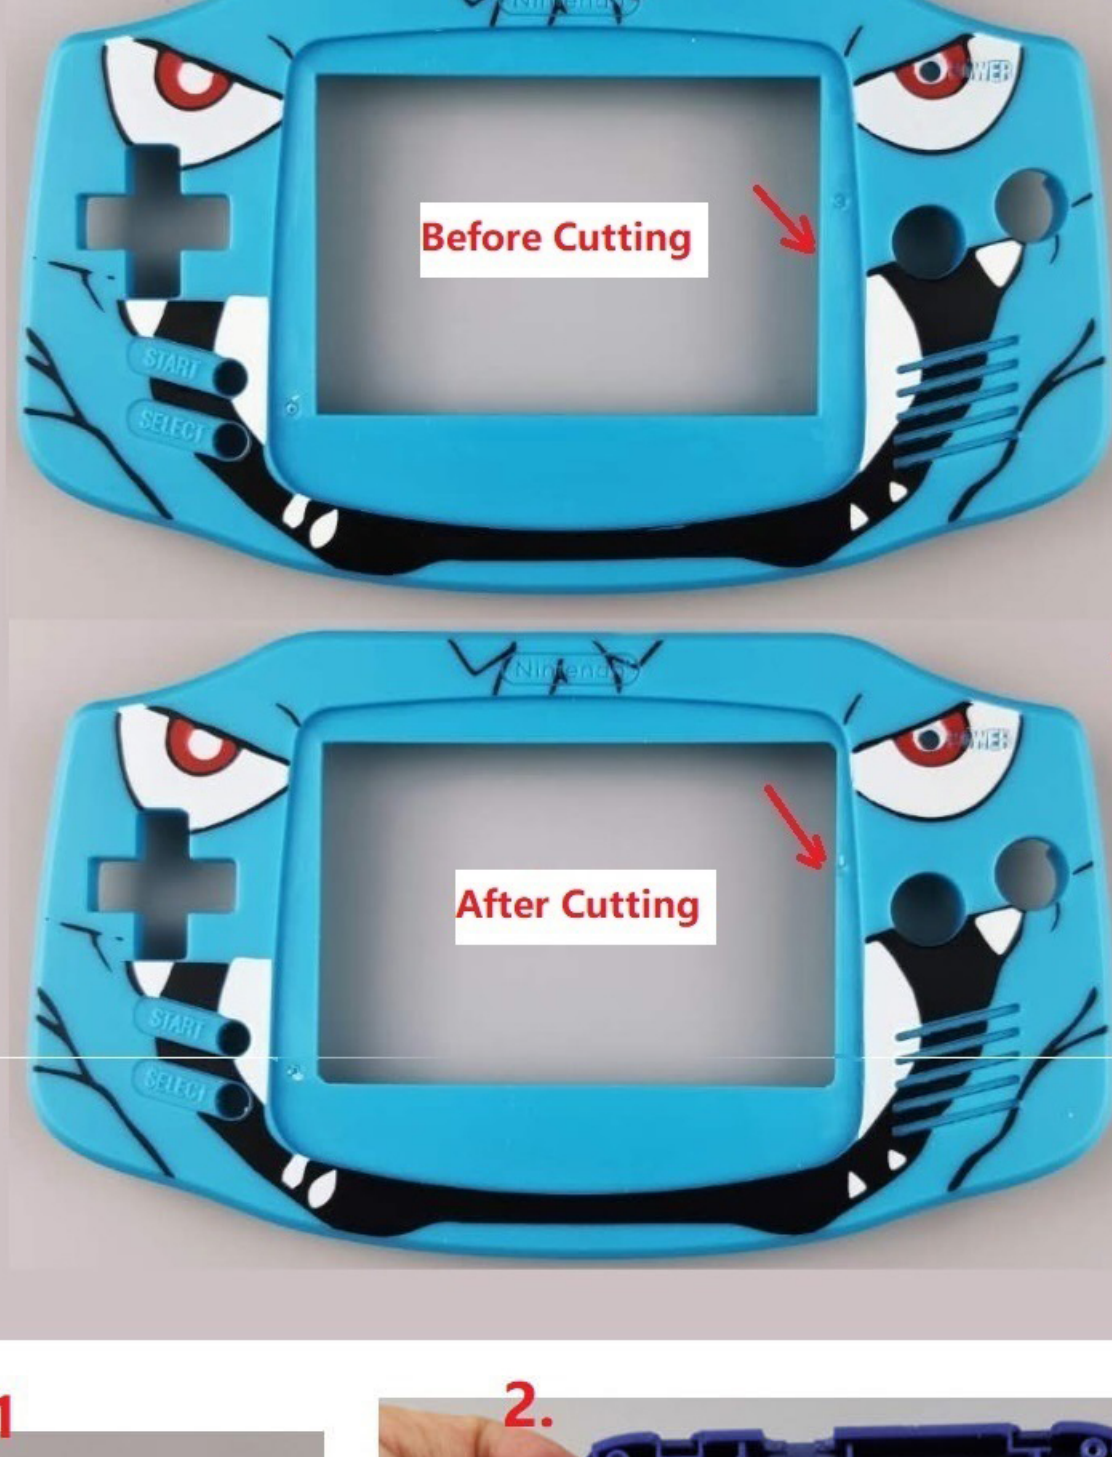
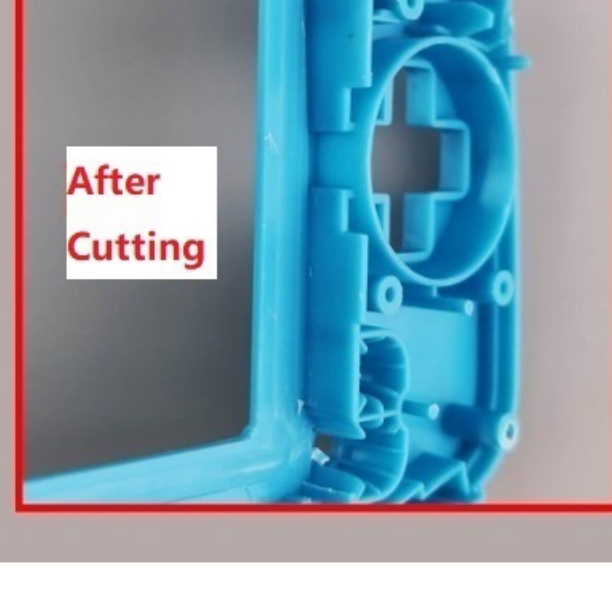
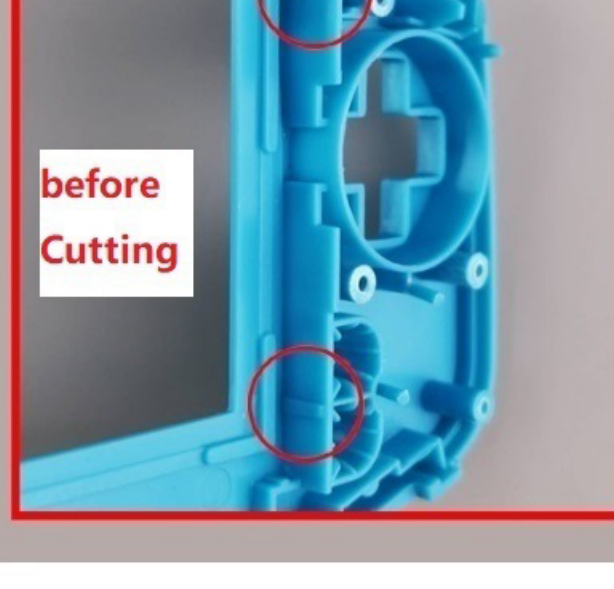



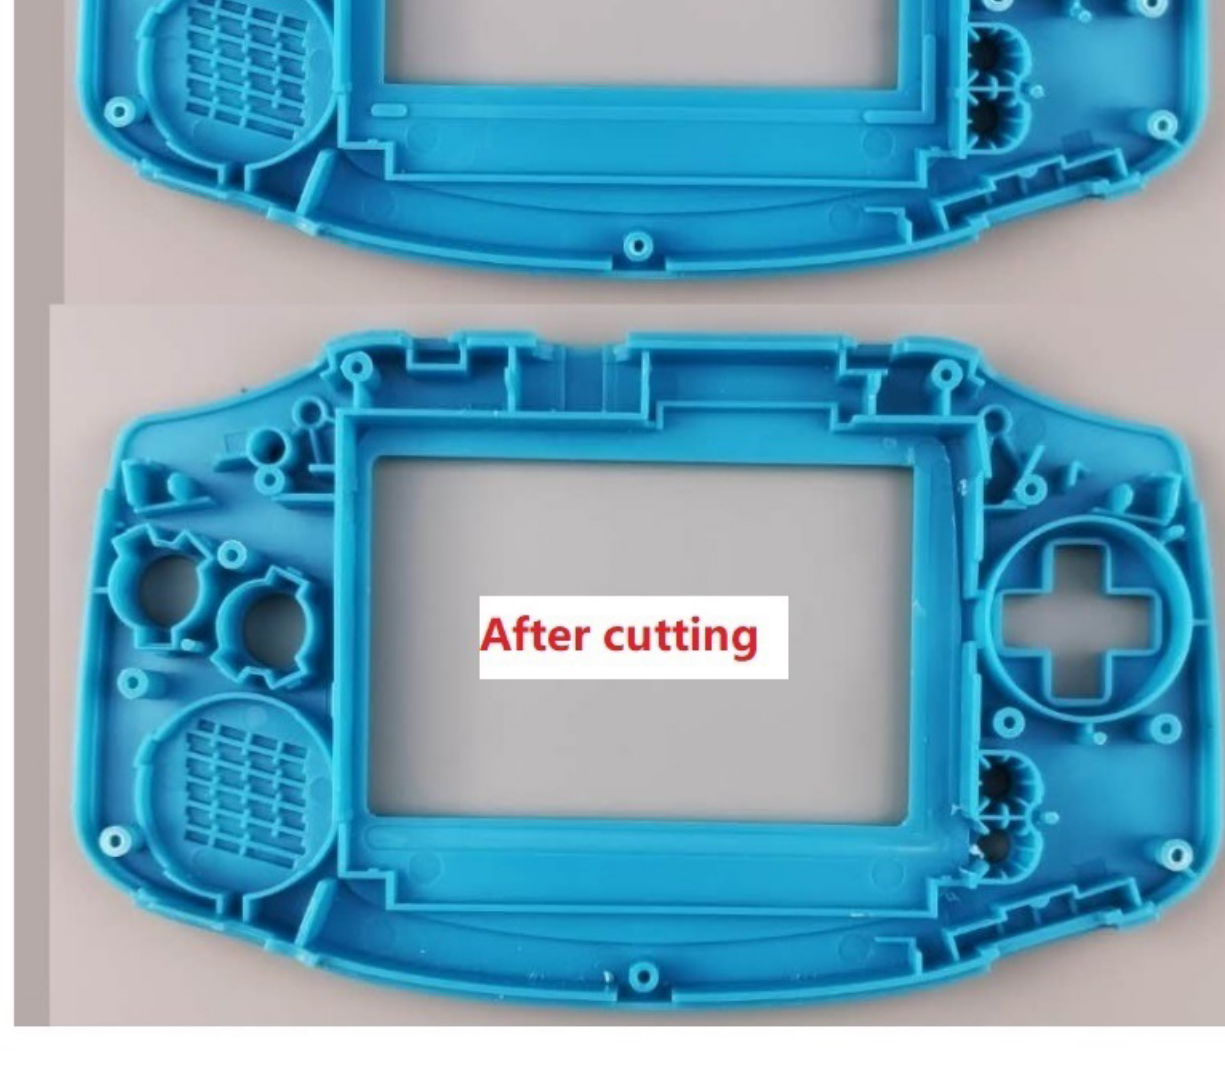


1. Because the ISP LCD little bigger than the original LCD. So, you need to use the ironworker's pliers to subtract the red part.

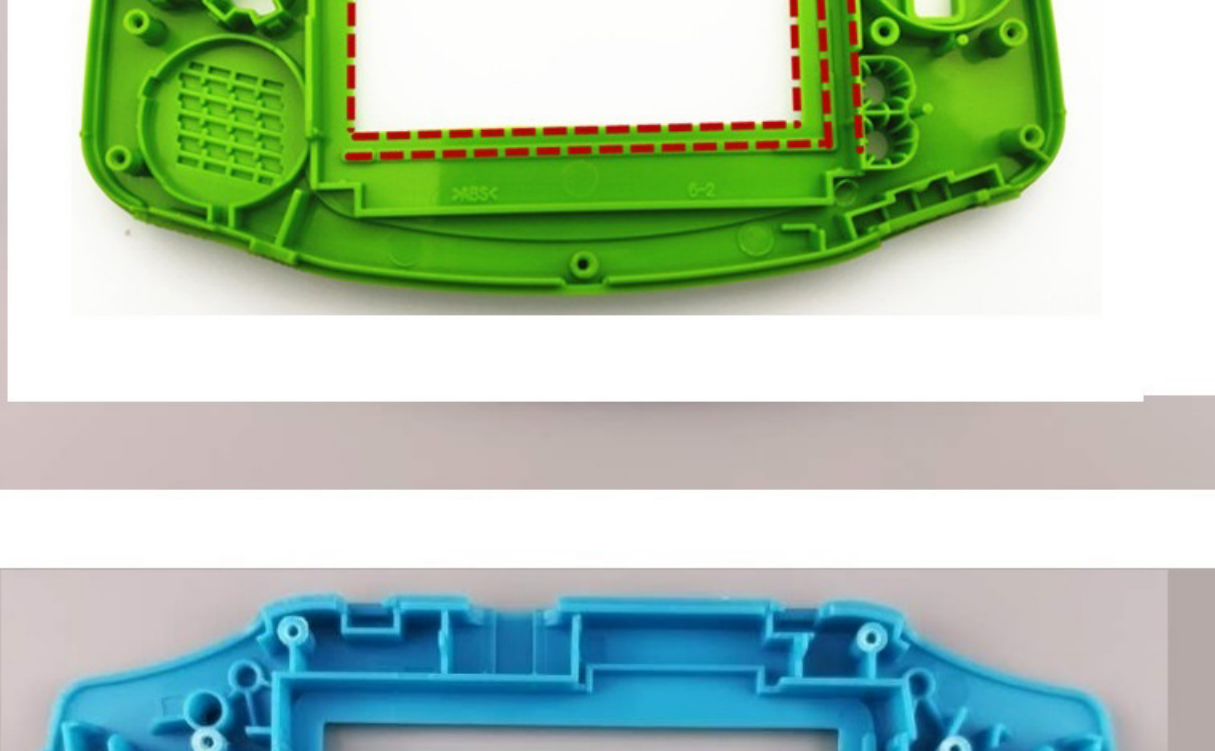


Connect SEL to the TP2, please check this picture. You don't need to solder the cables if you don't want to adjust the brightness.


6. Connect L,R to Motherboard's L, R like the picture. You don't need to solder the cables if you don't want to adjust the brightness.

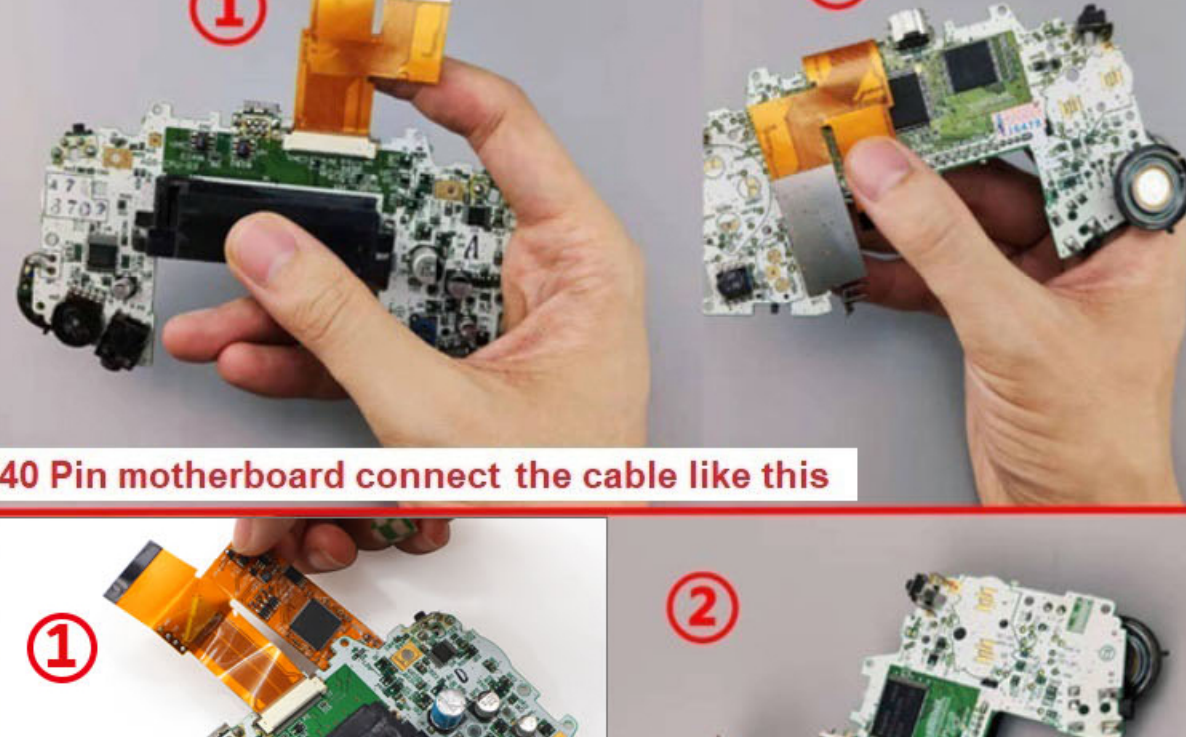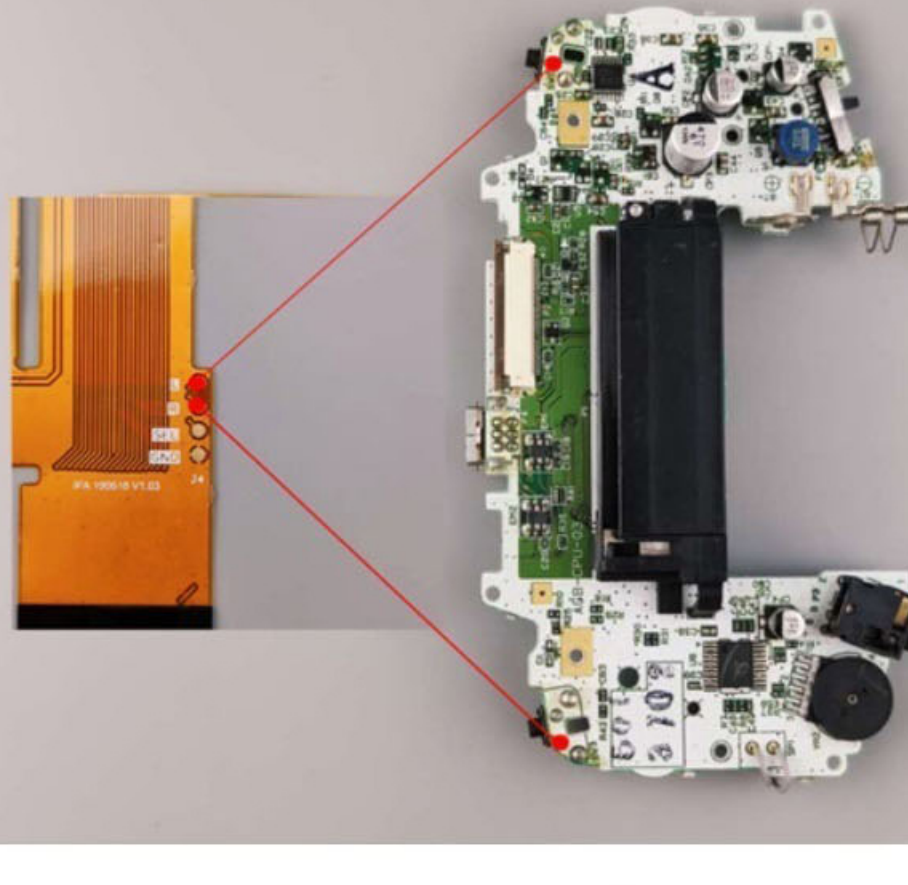

40 Pin motherboard connect the cable like this

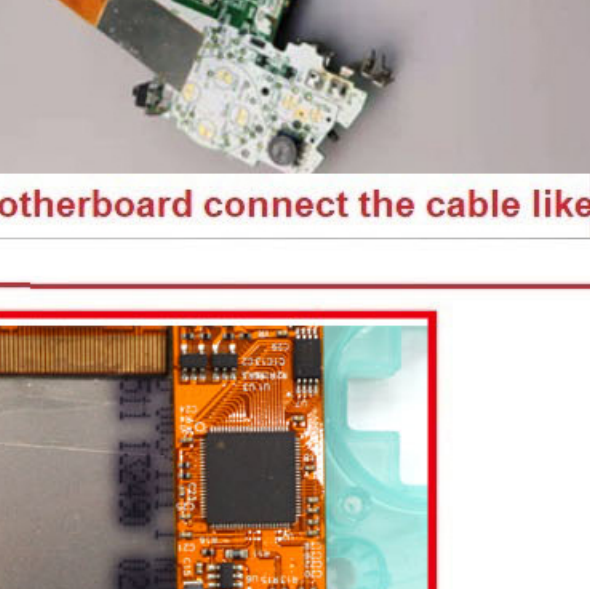

32 Pin motherboard connect the cable like this

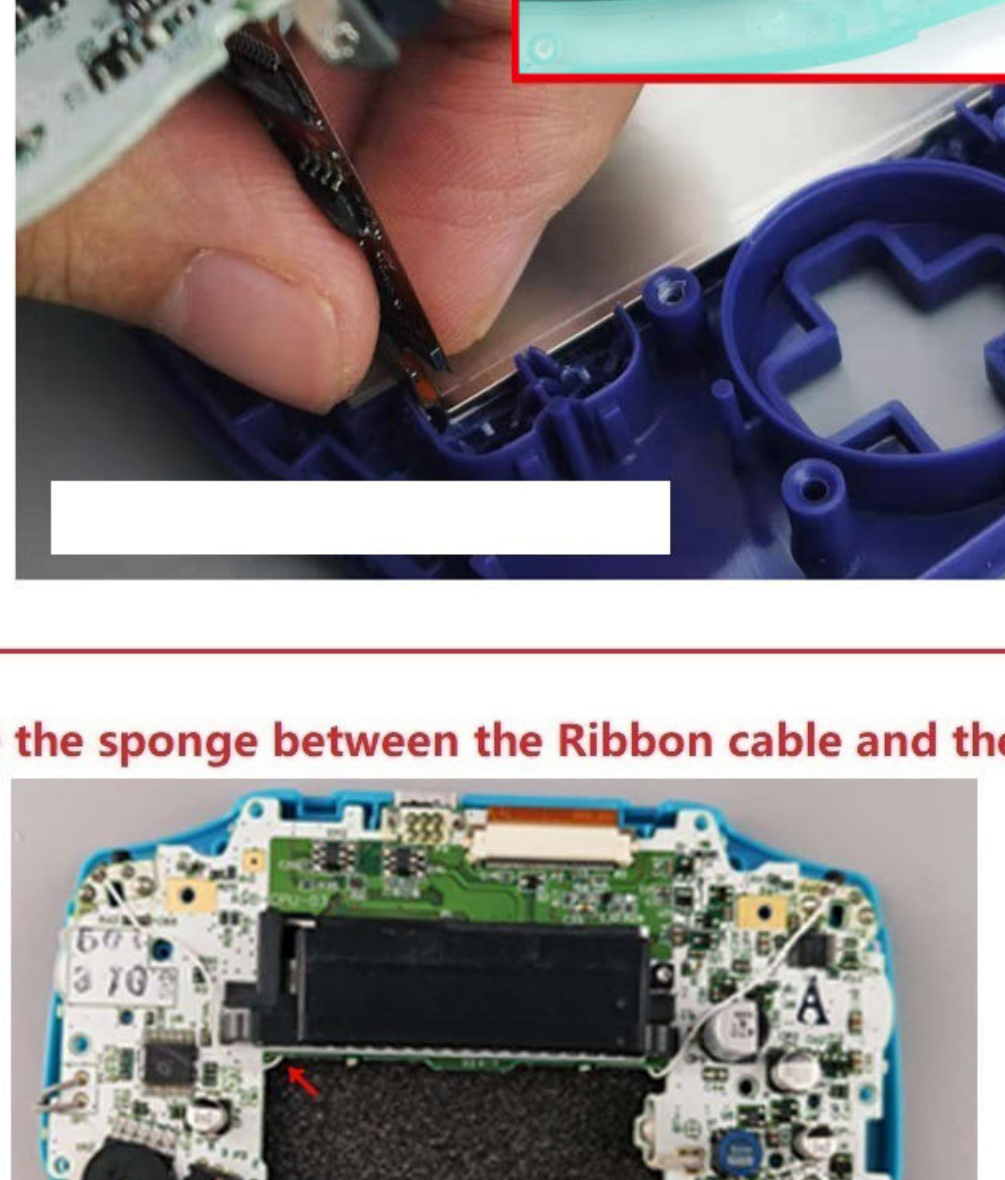

Place the sponge between the Ribbon cable and the motherboard



Done!